

Project:

Water repellency for porous or fibrous surfaces such as carton, plasterboard, drywall, plaster and absorptive wooden surfaces

Product:

SurfaPore F

Key Benefits:

- Long Lasting
- UV and Weather Resistant
- Easy surface application
- Can be used as primer
- Excellent washability
- Water based
- Adhesion promoter
- Environmentally friendly
- Cost Effective

Applications:

- Water protection of porous surfaces
- Waterproofs plasters, plasterboards, drywalls, wood and carton
- Prevents mould growth
- Prevents Cracking
- Paint primer
- Protects wooden surfaces susceptible to moisture (tropical woods, softwoods, plywoods)

Packaging:

1L, 4L, 30L Containers,
1000L IBCs


www.NanoPhos.com



SurfaPore® F

Water repellency of fibrous materials, plaster and wood Primer for plasterboard and drywall before painting

SurfaPore F is a water-based formulation that can be easily applied on fibrous surfaces such as plaster, plasterboards, drywalls, wood and carton. It protects and waterproofs surfaces assuring that water or other corroding factors are effectively repelled by chemical forces. Plasterboards and special wood types (tropical woods, softwoods and plywoods) are protected by moisture, mould and microorganisms. It can also be used as a primer on plasterboards and drywalls, improving the adhesion of paints. SurfaPore F modified surfaces can last longer, while their UV and weather resistance are enforced.

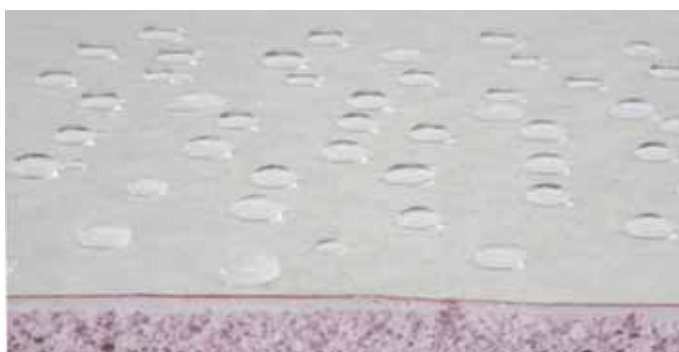

After SurfaPore F application, water is not absorbed by the protective carton nor by gypsum. Water droplets create beads due to the hydrophobicity of the surface.

SurfaPore® is a registered trademark of
NanoPhos SA,
PO Box 519,
Science & Technology Park of Lavrio
Lavrio 19500, Greece
T: +302292069312 F: +302292069303

NanoPhos
Pioneering
Nanotechnology 

SurfaPore F Description

SurfaPore F is a water based, liquid formulation, developed and produced by NanoPhos SA. SurfaPore F creates a thin layer on the modified surfaces, preventing water from penetrating. Because of its flexibility, it reduces the swelling and cracking effect. It reduces water absorption of substrates by up to 90%. SurfaPore F has a prolonged lifetime and great resistance to UV radiation and weathering, while at the same time it is really cost effective. Modified surfaces undergo minimal change to the original natural appearance.

Whilst SurfaPore F contains a moderate tough and flexible resin, the application and the adhesion of the solution on surfaces are favoured. Due to its composition, SurfaPore F can be used as a primer before painting, in surfaces such as plasterboards. In this way, the adhesion of paint on substrates is enforced. All in all, SurfaPore modified surfaces remain dry and unchanged in both appearance and mechanical properties.

International Standards Testing

Water absorption under low pressure (RILEM Test Method 11.4): The test procedure determines the water absorption rate of horizontal plasterboard surface. Loss of water is inversely proportional to waterproofness. After 24 hours with water contact, the treated sample exhibited 0,6 cm³ absorption, while the untreated absorbed 5 cm³. **Water absorption on kraft paper:** Water mass absorption was reduced 93,25% after 1 hour immersion in a water tank at Room Temperature.

Contact angle measurement: Waterproofing can be quantified with contact angle measurement between water and substrate. 120 seconds after depositing water droplet, SurfaPore F treated samples exhibited 135°, while untreated 45°.



Protective carton surface



SurfaPore F treated carton

Water contact angle on untreated sample on the left (absorption) and beading effect on SurfaPore F treated sample on the right.

Application Note

Surface Application: The application surface should be dry and clean. Apply SurfaPore F by using a brush or roller. No dilution is required. On very absorptive surfaces re-apply within 3 hours. Maximum water repellency is achieved 24 hours post application.

Consumption: Estimated consumption rate 8-10 m²/L, strongly dependant on the properties of the surface applied.

Physical Properties

Milky White, Water Emulsion with slight odour and pH = 7.0±0.5. Boiling & Flash Point: >100°C. Auto Ignition Point: >100°C. Density: 1.01±0.05 g.cm⁻³ Viscosity: 4 mPa·s SurfaPore F is not considered an oxidant.

Safety & Storage

The product is not classified as hazardous pursuant to the provisions set forth in EC Regulation 1272/2008 (CLP) (and subsequent amendments and supplements). Maximum VOC Content: 1 g/L (EU limit (2010): 30g/L). Request, read and comprehend the MSDS. Avoid freezing. Expiration Date: Two years after the production date.



What is Nanotechnology?

Nanotechnology refers to the scientific field, which deals with very small structures, usually sized below 100 nm. One nanometer (nm) is one billionth of a meter (10⁻⁹ m) - it is so small that if earth were one meter in diameter, then one nanometer would have been the size of an apple! Nano-sized materials reveal unique properties when compared to ordinary, bulk materials or even molecules.

NanoPhos at a Glance...

At NanoPhos, we take advantage of the unique properties of nanotechnology and invent clever materials that solve every day problems. By harnessing nanotechnology, we seek to create a more comfortable, safe and trouble-free living environment. We transfer innovations out of our lab into the hands of consumers. Our vision is clear: "Tune the nanoworld to serve the macro-world" – in simple terms we make nanoparticles solve common problems. NanoPhos was recognized in January of 2008 by Bill Gates as one of the most innovative companies and also received the 1st prize for innovation at the prestigious 100% Detail Show in London. NanoPhos is a rapidly growing company that is actively expanding its distribution network. Currently, the company is present in the UK, Norway, Sweden, Denmark, Portugal, Spain, France, Italy, Greece, Cyprus, Egypt, Sudan, Saudi Arabia, Bahrain, UAE, Qatar, Oman, Iran, India, New Zealand, China, Japan, Mexico, Guatemala, Thailand, Malaysia and Singapore.

www.NanoPhos.com



NanoPhos SA has been approved by Lloyd's Register Quality Assurance to follow the EN ISO 9001:2000 Quality Management System and the environmental management system EN ISO 14001:2004 for the development, production and sales of chemical products for cleaning and protection of surfaces and nanotechnology products. Furthermore, it is certified for occupational health and safety management systems with OHSAS 18001:2007.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY. The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that NanoPhos' products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent. NanoPhos specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. NanoPhos disclaims liability for any incidental or consequential damages. This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

ver 0315